



Qingdao Blossom Furnishings Limited



Ip65 Bee eye 19x40w RGBW 4in1 led moving head light with led ring


Ip65 Bee eye 12x40w RGBW 4in1 led moving head light with led ring



Voltage: AC100V~240V 50-60HZ
 Rated Power: 760W
 LED Source: 19x40W high power RGBW 4 in 1 LEDs
 Zoom: 1:6 zoom range from 7 to 42 degree
 Strobe: 0-25Hz
 Control Mode: DMX512, Sound-actived, Master/slave
 DMX Channels: 22/26/36/43/78/119 six channel mode
 Dimmer: 0-100% linear dimmer with 4 kinds of dimmer curve.
 Pan: 540°+16 bit fine
 Tilt: 250°+16 bit fine
 Display: LCD display with touch buttons.
 IP: IP65
 Fixture dimension: 434*260*577mm
 N.W: 22 Kg
 G.W: 26 Kg(1pc/ctn) .
 G.W: 75 Kg(2pcs/case)
 Package dimension: 61*53*45 CM (1pc/ctn)
 Flight case size: 87*46*80 CM(2pcs/case)
 Special Points.
 1. Each LED can be controlled individually. With unique honeycomb designed lens .
 2. The front lens can rotate without limitation in forward and reverse direction to create amazing effects .
 3. Can be used as beam, wash or effect light use (Kaleido effects) .
 4. With a extra LED ring for eye-candy effect. LED ring with macro effect .
 5. Pure aluminum casting waterproof housing, suitable for all kinds of environment.



Voltage: AC100V~240V 50-60HZ
 Rated Power: 760W
 LED Source: 12x40W high power RGBW 4 in 1 LEDs
 Zoom: 1:6 zoom range from 5 to 45 degree
 Strobe: 0-25Hz
 Control Mode: DMX512, Sound-actived, Master/slave
 DMX Channels: 22/26 two channel mode
 Dimmer: 0-100% linear dimmer with 4 kinds of dimmer curve.
 Pan: 540°+16 bit fine
 Tilt: 250°+16 bit fine
 Display: LCD display with touch buttons.
 IP: IP65
 Fixture dimension: 432*333*485mm
 N.W: 22 Kg
 G.W: 26 Kg(1pc/ctn)
 Package dimension: 61*53*45 CM (1pc/ctn)
 Special Points.
 1. Each LED can be controlled individually. With unique honeycomb designed lens
 2. The front lens can rotate without limitation in forward and reverse direction to create amazing effects
 3. Can be used as beam, wash or effect light use (Kaleido effects)
 4. With a extra LED ring for eye-candy effect. LED ring with macro effect
 5. Pure aluminum casting waterproof housing, suitable for all kinds of environment

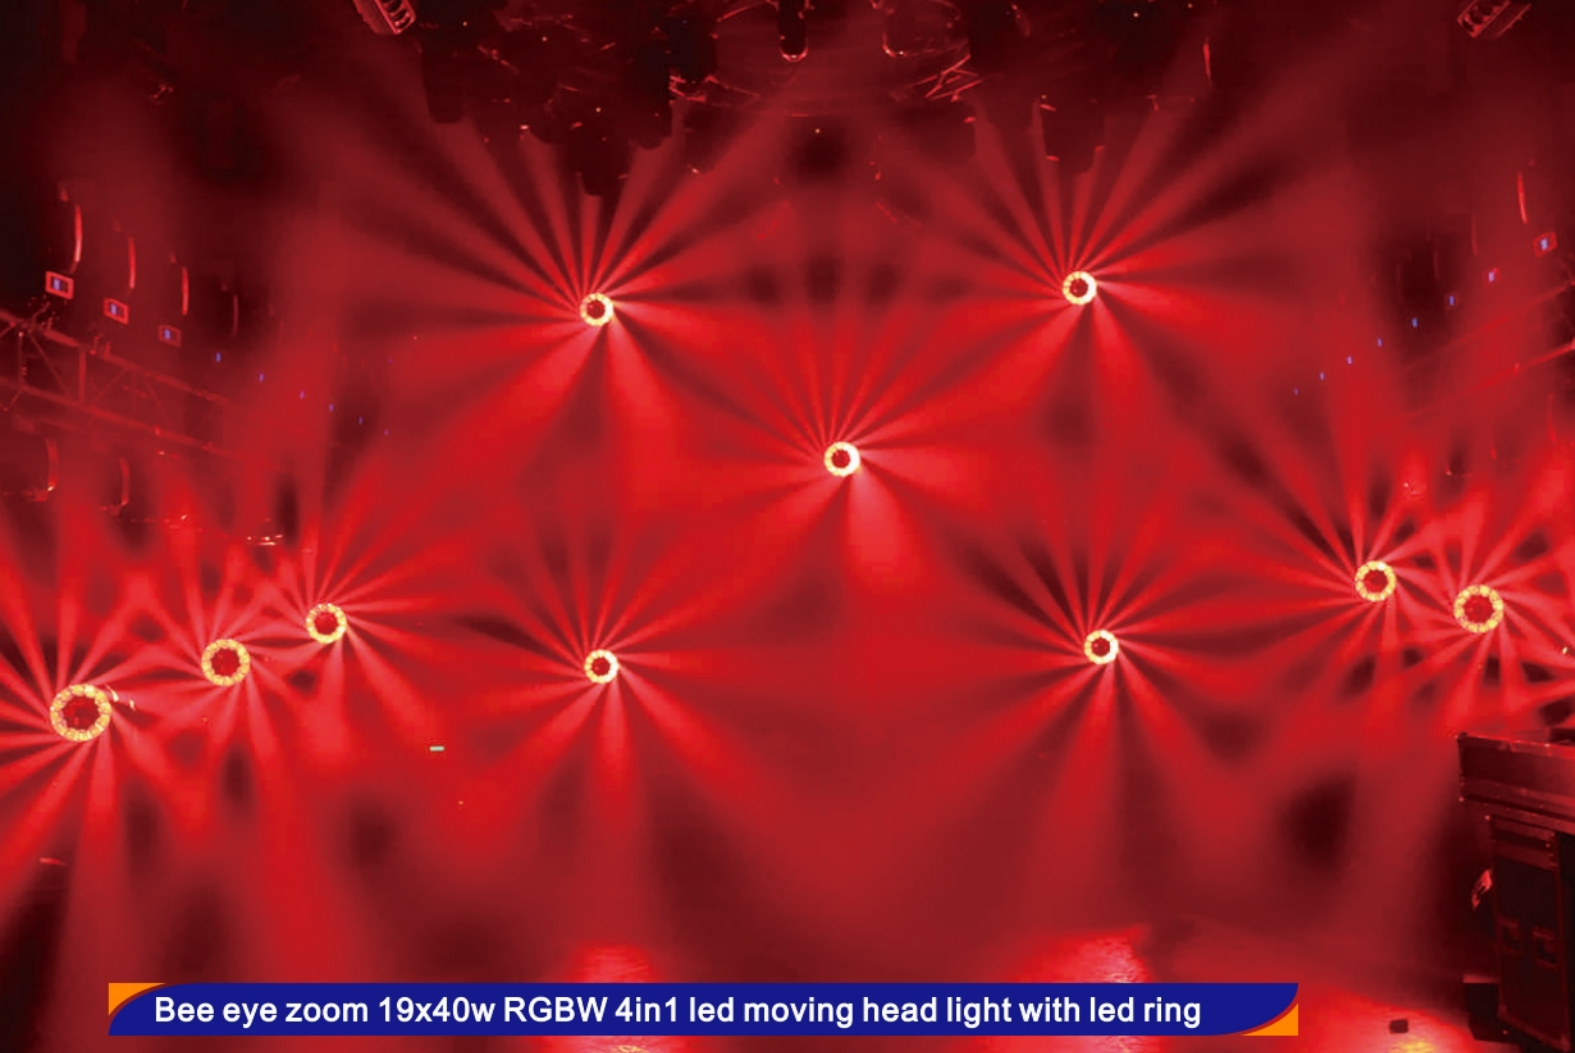

Bee eye zoom 19x40w RGBW 4in1 led moving head light with led ring



Bee eye zoom 19x40w RGBW 4in1 led moving head light with led ring



Voltage: AC100V~240V 50-60HZ
 Rated Power: 760W
 LED Source: 19x40W high power RGBW 4 in 1 LEDs
 Zoom: 7°-45°
 Strobe: 0-25Hz
 Control Mode: DMX512, Sound-actived, Master/slave
 DMX Channels: 22/26/36/78 four channel mode
 Dimmer: 0-100% linear dimmer
 Pan: 540°+16 bit fine
 Tilt: 220°+16 bit fine
 Display: LCD colorful display
 IP: IP20 Fixture dimension: 405*234*440mm
 N.W:15.2 Kg
 G.W: 18.7 Kg(carton)
 G.W: 56 Kg (flight case)
 Package dimension: 62*39*51 CM (1pc/ctn)
 Package dimension: 99*43*61 CM (2pc/case)
Special Points.
 1. Each LED can be controlled individually. With unique honeycomb designed lens
 2. The front lens can rotate without limitation in forward and reverse direction to create amazing effects
 3. Can be used as beam, wash or effect light use (Kaleido effects)
 4. With a extra LED ring for eye-candy effect, LED ring with macro effect



Voltage: AC100V~240V 50-60HZ
 Rated Power: 850W
 LED Source: 19x40W high power RGBW 4 in 1 LEDs
 Zoom: 7°-45°
 Strobe: 0-25Hz
 Control Mode: DMX512, Sound-actived, Master/slave
 DMX Channels: 22/26/36/43/78/119 six channel mode
 Dimmer: 0-100% linear dimmer with 4 kinds of dimmer curve.
 Pan: 540°+16 bit fine
 Tilt: 220°+16 bit fine
 Display: LCD display with touch buttons.
 IP: IP20
 Fixture dimension: 434*260*577mm
 N.W: 15.2Kg
 G.W: 18.7Kg (Carton)
 Package dimension: 48*38*51CM (1pc/ctn)
Special Points.
 1. Each LED can be controlled individually. With unique honeycomb designed lens
 2. The front lens can rotate without limitation in forward and reverse direction to create amazing effects
 3. Can be used as beam, wash or effect light use (Kaleido effects)
 4. With a extra LED ring for eye-candy effect, LED ring with macro effect
 5. Pure aluminum casting waterproof housing, suitable for all kinds of environment.



ZOOM 7x40w RGBW 4in1 led wash moving head light



ZOOM 12x40w RGBW 4in1 led wash moving head light



Voltage : AC100V - 240V 50-60HZ
 Power: 300W
 LED Source : 7x40W high power RGBW 4 in 1 LEDs
 Zoom : 4°-60°
 Strobe : 0-20Hz
 Control Mode : DMX512, Sound-activated, Master/slave
 DMX Channels : 23/35/51 three channel mode
 Dimmer : 0-100% linear dimmer
 Pan : 540° + 16 bit fine
 Tilt: 270° +16 bit fine
 Display : LCD colorful display
 IP Rate : IP20
 Fixture dimension : 347*246*438mm
 Carton package Size : 53*42*51cm (1pcs/ctn)
 N.W: 11.2KG
 Special Points.
 1. Each LED can be controlled individually. With unique honeycomb designed lens
 2. The front lens can rotate without limitation in forward and reverse direction to create amazing effects
 3. Can be used as beam, wash or effect light use



Voltage: AC90-240V 50-60HZ
 Max Power: 550 w
 Source: 12pcs 40w high brightness RGBW 4-in-1 leds
 Dimmer: 0-100% linear dimming system
 Strobe: 1-25 times/second
 Pan:540°with 16 bit fine
 Tilt:270° with 16 bit fine
 Zoom: 8-60°Smooth and fast zoom system
 LED working lifetime: Average 50,000 hours with low power consumption
 Channel: 19/67 two DMX channel mode
 Control: DMX512/master-slave/auto/sound
 Color: RGBW infinite mixture
 Display: LCD display
 Fixture size: 338 mm*264 mm*470 mm
 N.W: 14.2 kg G.W: 16.7KG
 Carton case(1in1):48*37*50cm
 Protection: Auto temperature control system with big cooling fan,advanced cooling system
 Special point:
 1. Built-in programs with macro effect.
 2. Each led is controllable individually
 3. With 3 phase motor on pan and tilt to make fast movement.



ZOOM 19x15w RGBW 4in1 led wash moving head light with circle control



ZOOM 19x15w RGBW 4in1 led wash moving head light with backlight



Light source: 19pcs 15W high brightness RGBW 4-in-1 LEDs
 Working lifetime: Average 50,000 hours with low power consumption
 Channel: 16/24 channels with macro effects
 Control: DMX512/Master-slave/Auto/Sound
 Strobe: 1-25 times/second
 PAN: 540 degree with 16 bit rotate
 Tilt: 270 degree with 16 bit rotate
 Beam angle: 8-50 degrees
 Color: RGBW infinite mixture
 Dimmer: 0-100% linear dimming system
 Protection: Auto temperature control system with big cooling fan.
 Quiet, smooth and fast PAN/TILT movement
 Low noise and efficient
 FAN cooling system Built-in pre-programs with macro effects.
 45°C max ambient temperature
 IP20 protection rating 3-Pin XLR DMX input/output
 Function: With LED shutter, scan position memory and auto reposition. LED rainbow effect. LED in circle.
 Smooth and fast speed, super low noise.
 Perfectly suitable for stage, theatre, TV studio, rental, DISCO and more.
 Packing details for 1pc/ctn
 Net Weight: 7.5 Kg
 Gross Weight: 9.3 Kg



Main LED: 19pcs 15W high brightness RGBW 4-in-1 LED
 Backlight LED: 30pcs 0.18W RGB 3-in-1 LED
 LED Working lifetime: Average 50,000 hours with low power consumption
 Channel: 14/25 two channel
 Control: DMX512/Master-slave/Auto/Sound
 Strobe: 1-25 times/second
 PAN: 540 degree with 16bit rotate
 Tilt: 270 degree with 16bit rotate
 Beam angle: 8-50 degrees
 Color: RGBW infinite mixture
 Dimmer: 0-100% linear dimming system
 Display: LCD display
 Protection: Auto temperature control system with big cooling fan.
 Quiet, smooth and fast PAN/TILT movement
 Low noise and efficient FAN cooling system
 Built-in pre-programs with macro effects.
 IP20 protection rating
 3-Pin XLR DMX input/output
 Function: With LED shutter, scan position memory and auto reposition.
 With backlight LED for perfect eye-candy effect use.
 Packing details for 1pc/ctn
 Net Weight: 7.7 Kg
 Gross Weight: 9.5 Kg
 Carton Package Size: 38*26*47.5 cm
 Packing size of light case(2in1):77*38*63cm
 N.W of flight case: 22KG
 G.W of flight case: 39KG



ZOOM bee eye 19x15w RGBW 4in1 led moving head light



25x12w RGBW 4in1 led matrix light



Voltage: AC100V~240V 50-60HZ
 Power: 450W
 LED Source: 19x15W high power
 RGBW 4 in 1 LEDs
 Zoom: 8-50° Strobe: 0-25Hz
 Control Mode: DMX512, Sound-actived, Master/slave
 DMX Channels: 21 CH/23 CH/35 CH/78 CH/92 CH/97 CH/99 CH
 Dimmer: 0-100% linear dimmer
 Pan: 540°+16 bit fine Tilt: 270°+16 bit fine
 Display: LCD colorful display
 IP: IP20
 Rechargeable Battery: Optional
 Artnet: Optional
 Fixture dimension: 415*275*425 mm
 Carton package Size: 53*42*51CM (1pcs/ctn)
 N.W:14.95 Kg G.W: 18.1Kg
 Flight case(2in1):700*460*700mm, G.W: 56KG
 Special Points.
 1. Each LED can be controlled individually. With unique honeycomb designed lens
 2. The front lens can rotate without limitation in forward and reverse direction to create amazing effects
 3. Display screen can be turned upside down with 180° automatically to fit the installation in different place, Display can be equipped with rechargeable battery to set DMX address without power connection.
 4. Can be used as beam, wash or effect light use (Kaleido effects)
 5. The scanning position can be memory, it will be automatically reset without expected movement after rotation.
 6. Fan cooling (fan will be change the speed with the temperature variation). Temperature detecting system (If the temperature detected error, the light will stop working to protect the fixture)
 7. Fast speed with 3 phase motors on Pan and Tilt



Voltage: AC90-260V,50-60Hz
 Power: 400W
 Led source: 25pcs 12W CREE RGBW 4-in-1 LEDs
 Channel: 19/29/117 three channels modes
 Control: DMX/Master-slave/Auto/Sound activated
 Pan: Unlimited+16 bit fine
 Tilt: Unlimited+16 bit fine
 Beam angle: 7°
 Dimmer: 0-100% linear dimming
 Strobe: 0-25 Hz
 Function
 1. Each LED controllable individually to bring more options designing.
 2. Super fast unlimited Pan/Tilt movement to bring more dynamic effect.
 3. Super low noise with as many as 117 channels to bring an unprecedented experience.
 4. The excellent beam wash and effect light for big event and high level club, bar, etc.



ZOOM 36X10W RGBW 4in1 led wash moving head light



ZOOM 37x15w RGBW 4in1 led wash moving head light



Voltage: AC90-240V 50/60Hz
 Power: 360W
 Source: 36pcs 10W 4-in-1 LEDs
 Strobe: 1-25Hz
 Color: RGBW infinite color mixture system
 Beam Angle: 12-55 Degree
 Channel: 14CHs
 Control: DMX/Master-Slave/Auto/Sound
 Pan: 540°+Fine
 Tilt: 280°+Fine
 Function: RGBW mixing to seven colors, color optional, dimmer, stroboscopic, X/Y rotate and speed controlable



Voltage: AC90-240V 50-60HZ
 Max Power: 600 w
 Source: 37pcs 15w high brightness RGBW 4-in-1 leds
 Dimmer: 0-100% linear dimming system
 Strobe: 1-25 times/second
 Pan: 540° with 16 bit fine
 Tilt: 270° with 16 bit fine
 Zoom: 5-60° Smooth zoom system
 LED working lifetime: Average 50,000 hours with low power consumption
 Channel: 20/60 two DMX channel mode
 Control: DMX512/master-slave/auto/sound
 Color: RGBW infinite mixture
 Display: LCD display
 Fixture size:
 386 mm*423 mm*263 mm
 N.W: 13.2 kg G.W: 15KG
 Protection: Auto temperature control system with big cooling fan, advanced cooling system
 Special point:
 1. With LED dimmer, scan position memory and auto reposition .
 2. Built-in programs with macro effect.
 3. 37pcs LED with 10 areas controllable effect to bring more amazing effect.
 4. With 3 phase motor on pan and tilt to make fast movement.



5x60w RGBW 4in1LED Pixel Zoom bar strobe moving head light



Voltage: AC110-240V 50/60Hz
 Max Power: 450 W
 Main LED Source: 5pcs 60W RGBW 4in1 led
 Beam degree: 1:10 zoom range from 4°-40°
 Strobe LED Source: 35pcs 3W white LED, 70pcs 0.2W RGB 3-in-1 LED
 Pan: Unlimited rotation
 Tilt: Unlimited rotation
 LED Lifetime: Average 50,000 hours
 Strobe: 0-25 times one second
 Dimmer: 0-100% linear dimmer
 Channel: 26/68 three channel mode
 Control mode: DMX-512, Auto-run, Sound activated
 Cooling system: fan forced cooling system
 Working environment: indoor
 Net weight: 13.9 KG
 Gross weight: 17 KG
 Fixture size: 51*10*30 cm
 Package size: 64*50*34 cm
 Each main LED is controllable individually, white strobe LED 5 areas controllable individually, RGB 3-in-1 effect light 10 areas controllable individually.
 Unlimited Pan/Tilt movement to bring dynamic effects.



LED Pixel Zoom Strobe bar moving head light 12pcs 40W RGBW 4-in-1 LED



Voltage: AC110-240V 50/60Hz
 Max Power: 500 W
 Source: 12pcs 40W RGBW 4in1 LED
 164*0.5w RGB 3in1 LED
 Beam degree: 3°-30°
 Tilt: 220 degree+ fine
 LED Lifetime: Average 50,000 hours
 Led: pixel control Strobe: 25 times per second
 Dimmer: 0-100% linear dimmer
 Channel: 27/30/67 three channel mode Control mode:
 DMX-512, Auto-run, Sound activated
 Cooling system: fan forced cooling system
 Working environment:
 indoor Net weight: 14.8 KG
 Fixture size: 100*16.5*22.5cm
 Package size: 110*19*37cm
 Gross weight: 17 KG



ZOOM 6x40w RGBW 4in1 led beam wash bar moving head light




ZOOM 12x40w RGBW 4in1 led beam wash bar moving head light



Voltage: AC110-240V 50/60Hz
 Max Power: 300 W
 Source: 6pcs 40W RGBW 4in1 led
 Beam degree: 1:7 zoom range from 5°-35
 Tilt: 220 degree+ fine
 LED Lifetime: Average 50,000 hours
 Led: pixel control
 Strobe: 20 times one second
 Dimmer: 0-100% linear dimmer
 Channel: 14/18/32 three channel mode
 Control mode: DMX-512, Auto-run, Sound activated
 Cooling system: fan forced cooling system
 Working environment: indoor
 Net weight: 9.2 KG
 Fixture size: 51*10*30 cm



Voltage: AC110-240V 50/60Hz
 Max Power: 500 W Source: 12pcs 40W RGBW 4in1 led
 Beam degree: 1:7 zoom range from 5°-35
 Tilt: 220 degree+ fine LED
 Lifetime: Average 50,000 hours
 Led: pixel control
 Strobe: 25 times per second
 Dimmer: 0-100% linear dimmer
 Channel: 14/20/57 three channel mode
 Control mode: DMX-512, Auto-run, Sound activated
 Cooling system: fan forced cooling system Working environment: indoor
 Net weight: 14.8 KG
 Fixture size: 102*10.75*27.7 cm
 Package size: 110*19*37cm
 Gross weight: 17 KG

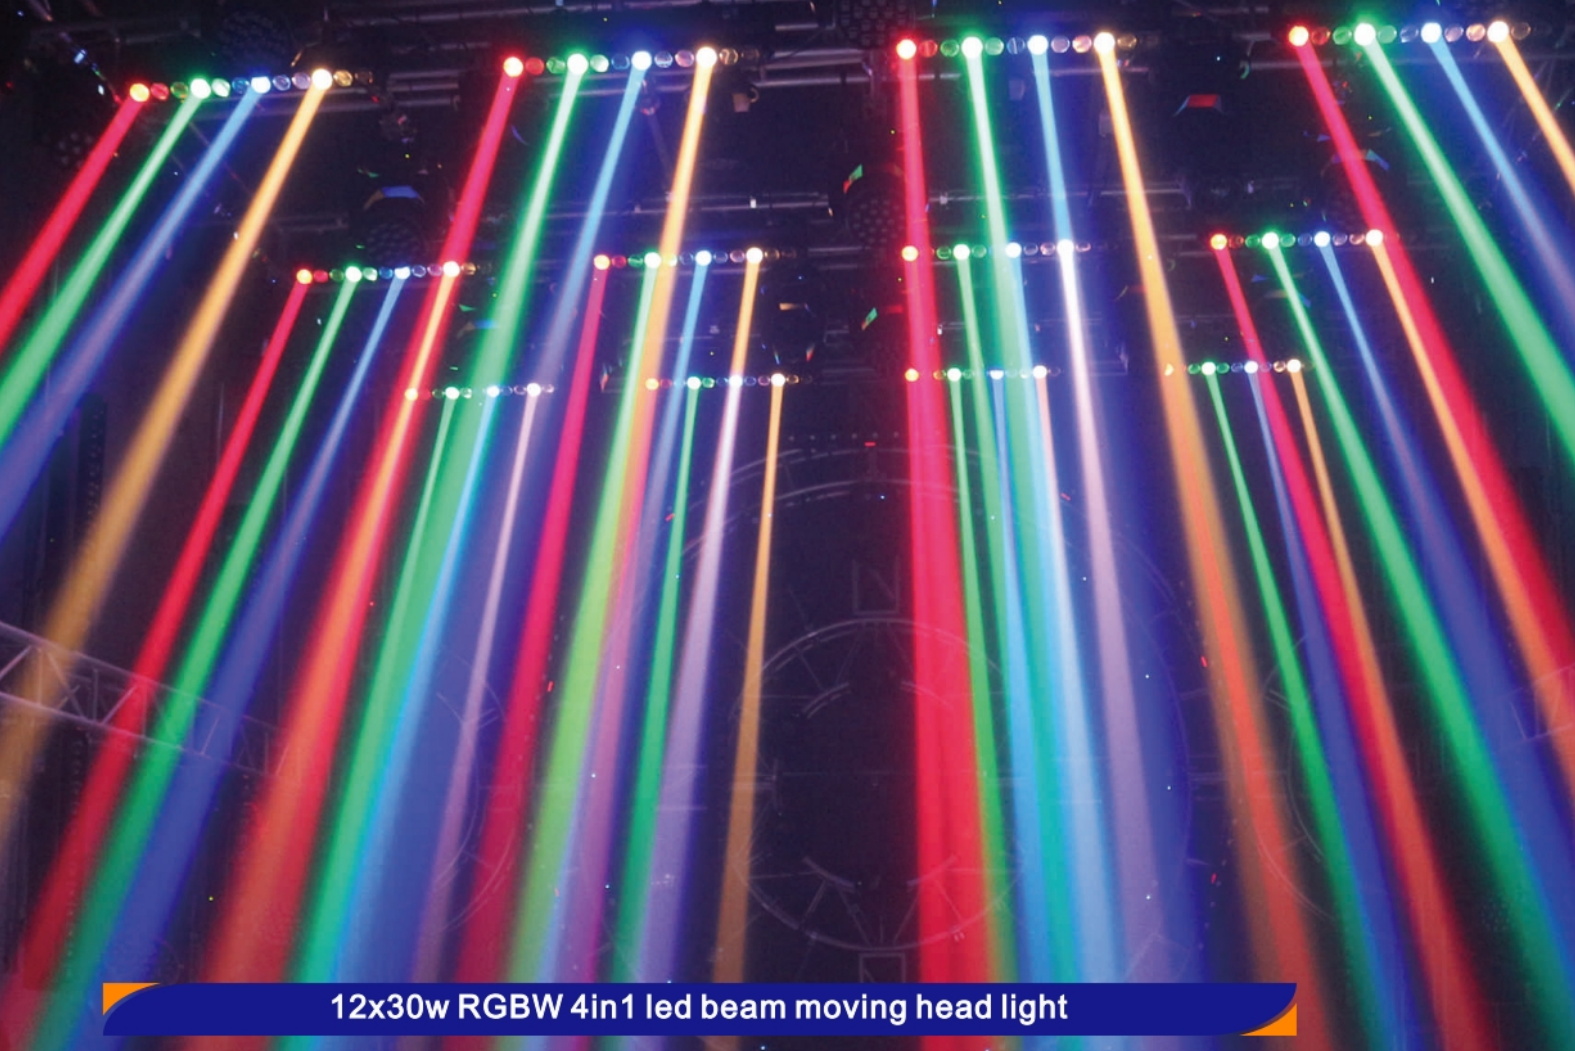

12x30w RGBW 4in1 led beam moving head light



400W LED Beam Wash Spot 3in1 Moving Head Light With CMY+CTO



Voltage: AC110-240V 50/60Hz
 Max Power: 370 W
 Source: 12pcs 30W RGBW 4in1 led
 Beam degree: 3 degree
 Tilt: 210 degree movement
 LED lifetime: Average 50000 hours
 Led: pixel control Strobe: 0-25 times per second
 Dimmer: 0-100% linear dimmer
 Channel: 13/537 two channel mode
 Control mode: DMX-512 signal control self-propelled mode, sound control mode
 Cooling system: fan forced cooling system Working environment: indoor Net weight: 9.6KG
 Fixture size: 101*21.5*10.5cm



Voltage: AC100-240V 50/60Hz
 Max power: 500 W
 Light source: 400W high brightness white LED
 LED lifetime: Average 50000 hours
 Dimmer: 0-100% linear dimmer
 Strobe: 0-25HZ/S with multi strobe effects
 Zoom range: 3-45 degree
 Pan: 540°+ 16bit fine
 Tilt: 270°+ 16bit fine
 Channel: 25 DMX Channel with RDM
 Color wheel: 8 colors+open
 CMY: CMY infinite color mixture
 CTO: Linear CTO
 Static gobo wheel: 10 gobos+open with shake effect and bi-direction rotation
 Rotation gobo wheel: 8 gobos+open with shake effect and bi-direction rotation
 Frost: With frost to make soft wash effect
 Prism: 3 facet prism with bi-direction rotation
 Focus: Electric focus
 Display: With 2.8 inch LCD display
 N.W: 21.3KG
 Fixture dimension: 365*290*665 mm



100w led beam moving head light with led ring



200w led beam moving head light



Voltage: AC100V-240V 50/60HZ
 Main Light source: 100W high brightness LED
 Ring LED: 48pcs 0.2 RGB 3-in-1 soft LED strip with multiple-built-in effects
 Rated power: 150W
 Beam angle: 2 degree
 Channel: 17CHs Color: 10 colors + open
 Gobo: 18 gobos + open
 Strobe: 0-25 times/second
 Pan: 540 degree+16 bit fine
 Tilt: 270 degree+16 bit fine
 Display: LCD display Prism: 24 facet prism
 Frost: Linear frost
 Colorful wheel: 6 colors honeycomb wheel mix with prism to create colorful-effect
 Focus: Electric focus
 N.W: 13.5 KG
 G.W: 15 KG



Voltage: AC100V-240V 50/60HZ
 Light source: 200W high brightness LED mould
 Power consumption: 250W
 Beam angle: 2.3 degree
 Channel: 14CHs Color: 12 colors + open
 Gobo: 14 gobos + open
 Strobe: 0-25 times/second
 Pan: 540 degree+16 bit fine
 Tilt: 270 degree+16 bit fine
 Display: LCD display
 Prism: 24 facet prism
 Frost: With frost+6 colors honeycomb wheel
 Focus: Electric focus N.W: 12.5KG



17R Moving Head Light



230W Moving Head Beam



- Lighting source:OSRAM SIRIUS HRI 350W lamp
- Lifetime: 1500 hours,Color temperature:8000K
- Lens: high precise optic lens
- Voltage: 100V-240V 50/60Hz
- Control mode:DMX 512,Master/Slave,Automatic
- Channel:standard 25 channels/simple 17 channels/extended 30 channels
- Pan 540 degree,Tilt 230 degree,automatic position
- Pan 2.9 S/540 degree,Tilt 1.5S/230 degree
- One color wheel, 14colors+white,half color,two-way rotation
- One rotate gobo wheel,7 replaceable gobos, gobo rotate,gobo shake
- One fixed gobo wheel, 12gobos,gobo shake,two-way rotation
- 12-face round prism (prism angle from 10 degrees to 20 degrees)
- Frost,angle can be adjustable
- Beam 0-3 degree、 Spot 3-20 degree、 Wash 20-60 degree
- Focus: Linear Focus Dimming:0-100% linear dimming
- Strobe:0.5-20 F.P.S
- 3phrase motor,make sure quiet movement
- Record lamp work time and light work time



- Lighting source:OSRAM 7R high brightness lamp
- Lifetime:2000 Hours
- Lens:Optic glass lens,beam angle:4 degree
- Voltage:100V-240V 50/60Hz.
- Control mode:DMX 512,Master/Slave,Automatic
- Channel:16/20 channels,two channel mode
- Pan 540 degree,Tilt 270 degree,automatic position
- Color wheel:one color wheel, 14 color sheet + blank
- Gobo wheel:one gobo wheel, 17 gobo sheet + blank
- Effect wheel:8-prism lens.Move and atomize effect
- Dimming:0-100% dimming. mechanical strobe and strobe speed
- Beautiful touch screen,easy operate
- Pan/Tilt reverse,Display reverse
- Fast and quiet movement
- Same channel as Sharpy



380w beam moving head light



400W led beam wash spot 3in1 moving head light



Voltage: AC100V-240V 50/60HZ
 Light source: 380W lamp
 Power consumption: 450W
 Fuse: 7A
 Channel: 16CHs
 Color: 14 colors + open
 Gobo: 17 gobos + open
 Strobe: 0-10 times/second
 Pan: 540 degree+16 bit fine
 Tilt: 270 degree+16 bit fine
 Display: LCD display
 Prism: 16+48 facet prism
 Electronic focus, frost effect
 N.W: 20.5 KG
 G.W: 23.5 KG
 Package size(1/CTN): 48.5*48*72 CM



Voltage: AC100-240V 50/60Hz
 Max power: 500 W
 Light source: 400W high brightness white LED
 LED lifetime: 20000 hours
 Dimmer: 0-100% linear dimmer
 Strobe: 0-25HZ/S with multi strobe effects
 Zoom range: 6-38 degree
 Pan: 540°+ 16bit fine
 Tilt: 270°+ 16bit fine
 Channel: 17 DMX Channel with RDM
 Color wheel: 7 colors+open
 Static gobo wheel: 7 gobos+open with shake effect and bi-direction rotation
 Rotation gobo wheel: 7 gobos+open with shake effect and bi-direction rotation
 Frost: With frost to make soft wash effect
 Prism: 3 facet prism with bi-direction rotation
 Focus: Electric focus
 Display: With 2.8 inch touch display
 N.W: 24.1 KG
 Fixture dimension: 396*290*694 mm



Profile 400w LED beam wash spot 3in1 moving head light with framing system



Laser Bar



Voltage: AC100-240V 50/60Hz
 Max power: 550 W
 Light source: 400W high brightness white LED
 LED lifetime: 20000 hours
 Dimmer: 0-100% linear dimmer
 Strobe: 0-25HZ/S with multi strobe effects
 Zoom range: 6-38 degree
 Pan: 540°+ 16bit fine
 Tilt: 270°+ 16bit fine
 Channel: 26 DMX Channel with RDM
 Framing: 8 facet & 4 blades framing shutters modules
 Color wheel: 7 colors+open
 Rotation gobo wheel: 7 gobos+open with shake effect and bi-direction rotation
 Frost: With frost to make soft wash effect
 Prism: 3 facet prism with bi-direction rotation
 Iris: 5%-100% Iris
 Focus: Electric focus
 Display: With 2.8 inch touch display
 N.W: 25.6KG
 Fixture dimension: 396*290*694 mm



Voltage: AC110-240V 50/60Hz
 Max Power: 80w
 Source: 8x3w led warm white, 8pcs 638nm 500mw red laser
 LED working lifetime: 50000 hours
 LED Color temperature: 3200k
 Channel: 7/9/18/24 four channel mode
 Tilt: 90°
 Laser Pattern: Various Thick Beam Effect Patterns
 Control mode: DMX-512 signal control, self-propelled mode, sound control mode,
 Cooling system: fan cooling system
 Working environment: indoor
 Fixture size: 107*8*6.8CM
 Packing size(1in1) : 115*16*26cm
 W: 8.3kg
 G W: 9.5kg
 Packing size (2in1) : 120*39*29cm
 G W: 19.5kg

18*10W LED Par

LIGHT SOURCE, OPTICS

- Lighting source: 18*10W 6 in 1 LED, LED lifetime:60,000 hours
- Lens:25 degree lens with smooth color mixing

CONTROL

- Voltage: 100-240V,50/60Hz
- Control mode:DMX 512,Master/Slave,Automatic,sound activate
- Channel: 10/6 channel mode for your special choose

FUNCTION

- Dimmer: 0-100%,5kinds of dimming speed
- Strobe: 0-25 F.P.S,with pulse function
- Built-in programs,and self-edit programs



54*3W LED Par



- .Input Voltage: AC110V/220V 50HZ/60HZ
- .Power Consumption: 180W
- .54*3W HIGH BRIGHTNESS LED
- .LED life time:100000 hours
- .Beam angle:15°,25°,45°can be choose
- .Control mode:DMX512 sound control/master and slave/stand along self propelled
- .Channel:8 DMX channel mode
- .Housing material:Die cast-aluminium
- .Dimmer: 0-100% smooth linear dimmer
- .Display:4 digit LED display
- .Fixtures:Attached an easily mounted metal holder
- .IP:20

.Input Voltage: AC110V/220V 50HZ/60HZ

.Power Consumption: 180W

.54*3W HIGH BRIGHTNESS LED(R 12pcs,G 18pcs,B 18pcs,W 6pcs)

.LED life time:100000 hours

.Beam angle:5°/25°/45°degree can be choose

.Control mode:DMX512 sound control/master and slave/stand along self propelled

.Channel:8CH DMX channel mode

.Housing material:Die Cast-aluminium

.Dimmer: 0-100% smooth linear dimmer

.Display:4 digit LED display

.Fixtures:Attached an easily mounted metal holder

.IP:65

54*3W LED Par Outdoor



18*10W LED Par



- Lighting source: 18*10W 4 in 1 LED,LED lifetime:60,000 hours
- Lens:25/60 degree lens with smooth color mixing
- Voltage: 100-240V,50/60Hz
- Control mode:DMX 512,Master/Slave,Automatic
- Channel: 4.5.6.7.11 channel mode for your special choose
- Dimmer: 0-100%,5kinds of dimming speed
- Strobe: 0-25 F.P.S,with pulse function
- Built-in programs,and self-edit programs
- Color temperature adjustable
- Perfect dimming,Perfect color mixing
- Big fans and thermal control to make sure the warm release is good.
- Thick shell,thick brackets

LED Audience Blinder

Voltage:90-240V 50/60Hz

LED:4pcs 100W Warm white+Cool white LED

Beam angle:70 degree (Sharp beam effect)

Dimmer:0-100% linear dimmer

Strobe:1-25times/sec or random strobe

Variable run method,jump change,Gradual change

4 LED have different run method

IP65 rate



12*18W Battery Par

Power supply:AC100V-250V,50-60Hz

Lithium Battery:10000MHA

Power consumption :220W

Light source:12pcs*18W 6 in 1 leds

IP Rate:IP65

Lamp life:6-10 ten thousand hrs

LED angle :15(±5) degree

Color:16.7 million kinds of color change

Control channels:7/11 chs

Built in 2.4G receiver/ transmitter for wireless DMX operations support IOS and Andriod phone control and Remote control

Control mode :DMX512, wireless dmx512,Wifi App control, master/slave, auto, sound active

Automatic model:Color change,stroke,dimmer,gradual change, jump change

Operation menu:Touch display

G.W:7kg

The battery can last for 3-4 hours when all LEDs on after full charge , and can last for more than6-8 hours on auto running mode. single color working can last about 10 hours , Results will varybased on brightness of LEDs



- 100W COB LED
- Warm white,Cool white,Warm and Cool white
- LED lifetime:50,000 hours
- 70 degree reflector
- AC100-240V 50/60Hz
- Control mode:DMX 512,Master/Slave,Automatic
- DMX Channel: 1/2/4/8 Channel
- Each LED can be controllable individual
- Color jump change,Color gradual change,Color pulse change
- Color change speed adjustable
- 0-100% Linear Dimming
- 0-25 F.P.S Speed adjustable
- New shell,have enough space for power supply
- Separate for power supply and cooling fin,good warm release
- Supper brightness

LED Audience Blinder



LIGHT SOURCE,OPTICS

- 18*10W 6 in 1 high brightness LED
- LED life time:80000 hours
- Beam angle:30 degree lens

CONTROL

- Input Voltage:AC100-240V,50/60Hz
- Control model:DMX512,Master-slave,Sound activate,Auto
- Control channel:11 DMX channel

FUNCTION

- Dimmer: 0-100% linear dimmer speed,speed adjustable
- Strobe: electronic strobe 0-25 F.P.S
- Built-in programs:3 built-in programs,speed can be adjustable

OTHER

- Two parts body design,make sure the warm release is good.
- Good Dimming,suitable for your strict demand on Dimming
- IP:65

LED Wall Washer



LED Flood Light

Input voltage: AC90-140V 60Hz/AC190-240V 50Hz

Power: 800W

Light source: 96*10W RGBW/RGBA 4in1

Light life:50000 hours

Dimmer: 0-100%

Strobe:1-20 time/sec

Beam Angle : 40°/25°/15°optional

Running Mode:standard DMX512 signal,master-slave, Auto

DMX channel: 4/8/12CH

Cooling system:Natural convection heat transfer

Body and color: aluminum and black.

IP Rate: IP65

Effect distance: 60m

Working Temperture: -20°C ~ 40°C



LED Profile Light

- Input Voltage: AC100-240V,50-60Hz
- Power consumption :390W
- 300W CITIZEN LED from Japan
- Color Temperature:Warm white/3200K or Cool white/6500K
- Led Life Time: 80000 Hours
- High-quality optical system , Glass reflector
- 92% optic efficiency
- Clear gobo,with no blue blurry edge
- Control mode: DMX/Master-slave/Auto/Sound activated
- Channel: 1/3CH
- Dimmer: 0-100% smooth linear dimmer
- Strobe: 1-25Hz with pulse effect
- Cooling system: Quiet Fan with copper cooling fin(Pccooler)



LED Fresnel Light

- Input Voltage: AC100-240V,50-60Hz
- Power consumption :390W
- 300W CITIZEN LED from Japan
- Color Temperature:Warm white/3200K or Cool white/6500K
- Led Life Time: 80000 Hours
- Fresnel Glass lens
- Manual zoom angle: 15-50 degree
- Control mode: DMX/Master-slave/Auto/Sound activated
- Channel: 1/3CH DMX channel
- Dimmer: 0-100% smooth linear dimmer
- Strobe: 1-25Hz with pulse effect
- Cooling system: Quiet Fan with copper cooling fin(Pccooler)



- Input Voltage:AC90-140V 60Hz/AC190-240V 50Hz
- LED Source:180PCS*3W RGB 3 in 1 LEDs
- Power consumption:600W
- Beam Angle:25°/45°/60°optional
- Good mix color
- LED life: about 50000 hours
- Dimming: 0-100% linear dimming,
- Strobe:0-20 F.P.S Strobe speed adjustable
- Channel: 3/7/11 DMX channel
- Running Mode:standard DMX512 signal, master-slave, Auto
- Shell material: aluminum alloy with nice Plastic
- IP Rate: IP55
- Effect distance: 60m



LED City Color

Voltage:100-240V 50/60Hz
 LED:48pcs 10W RGBW LED
 Beam angle:60 degree angle
 Dimmer:0-100% linear dimmer
 Strobe:1-25times/sec or random strobe
 Variable run method,jump change, Gradual change
 New Aluminum shell,have good waterproof function
 IP65 rate



Input voltage: AC90-240V 50/60Hz
 Power Consumption: 350W
 LED Source: 108pcs*3W RGB 3 in1 LEDs
 Beam angle: 15°,25°,30°, 45°(optional)
 Cooling system: natural convection heat transfer
 Operation Mode:Auto,Sound active,Master-Slave,DMX512
 DMX channel: 3/7/13CH DMX channel
 3 pin XLR data input & output
 Dimming: 0-100% linear Dimmer
 Strobe:0-20 F.P.S, Speed adjustable
 IP Rate:IP55
 Linear RGB color mixing allows for infinite color changing
 Led display



Led retro light

Input Voltage:AC90V-240V 50/60Hz
 Power:420W
 Cooling system:Metal thermal conductivity
 Maximum operating temperature:45°C
 Lighting source:6 pcs 60W warm white LED+144pcs RGB 3 in 1 LED
 Unique Optic lens,3 times improve the lights output
 Strobe:1-25 times per second
 DMX channel mode:8CH and 28CH,two channel mode
 Control mode:DMX 512/Auto/Sound activate
 DMX Connector:3Pin XLR
 Power Con in and out



Input Voltage:AC90-240V 50/60Hz
 Light source:54*3W RGBW LED
 Power Consumption:200w
 Channel: 8CH DMX channel
 RGB dimming, level 256 brightness separately, no flicker
 A variety of function of strobe effect and color of the rainbow
 Operation Mode:Auto,Master-Slave,DMX512
 Cooling mode: Natural Convection
 IP Rate: IP 65
 Strobe:0-20 F.P.S,Speed adjustable



